* Fabric Requirements

2 ¹/₂ - 3 yards coordinating light, medium, and dark greens
3 ³/₄ yards white for sashing, setting triangles, and corner triangles
³/₄ yard green for binding
4 ¹/₂ yards for backing

Yardage is based on 40 - inch wide fabric

* <u>Cutting Instructions</u>

Blocks

From light, medium, and dark greens:

• Cut 392, 2 ¹/₂ - inch squares

Sashing

From white:


- Cut 24, 2 ¹/₂ x 40 inch strips
- From 11 of these strips cut
 86, 2 ¹/₂ x 4 ¹/₂ inch rectangles
- Remaining 13 strips to be cut later

Setting and Corner Triangles


From white:

- Cut 4, 14 x 40 inch strips
- From these strips cut
 7, 14 inch squares
 2, 8 inch squares

 Cut 14 - inch squares in half diagonally twice to make 28 quarter setting triangles. You will use 26 of these triangles.



 Cut 8 - inch squares in half diagonally to make 4 corner triangles.



 Setting and corner triangles are cut larger than needed and will extend beyond blocks.

Binding

From green:


Cut 8, 2 ¹/₄ - inch strips

* Piecing

Use 1/4 - inch seam allowance throughout

Blocks

• Arrange and sew blocks as shown.

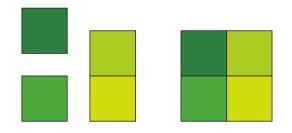

Make 98

* Quilt Assembly

 Arrange and sew blocks in rows as shown, alternate with 2 ¹/₂ x 4 ¹/₂ - inch sashing rectangles.





Make 2



Make 2



Make 2








Make 2



- Sew 13, 2 ½ x 40 inch white sashing strips end to end.
- From pieced length cut sashing. Make adjustments to the following measurements if necessary:

Cut 2, 2 ¹/₂ x 16 ¹/₂ - inch strips 2, 2 ¹/₂ x 28 ¹/₂ - inch strips 2, 2 ¹/₂ x 40 ¹/₂ - inch strips 2, 2 ¹/₂ x 52 ¹/₂ - inch strips 2, 2 ¹/₂ x 64 ¹/₂ - inch strips 1, 2 ¹/₂ x 70 ¹/₂ - inch strip

• Attach sashing to rows as shown.





• Center rows share the same sashing strip.

Make 1 center unit

• Attach setting triangles and trim even with top edge of row.




















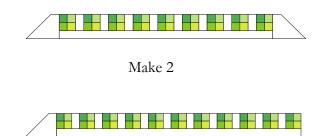



 Arrange and sew corner units as shown. Trim setting triangles even with top edge of blocks. Corner triangles will be trimmed later.






Make 4

- Referring to quilt assembly diagram arrange and sew rows as shown.
- Start with center unit and work outwards. Attach the remaining two corner units last.


• Trim corners of quilt as shown. Quilt should extend 2 - inches beyond blocks.

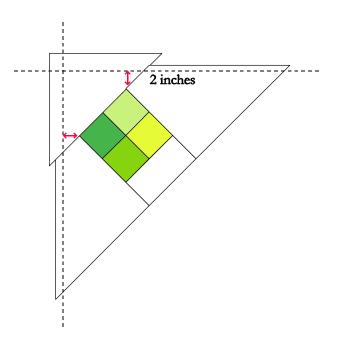


• Trim sides of quilt in same manner.

* Finishing

• Layer, baste, hand or machine quilt, trim, and add binding.

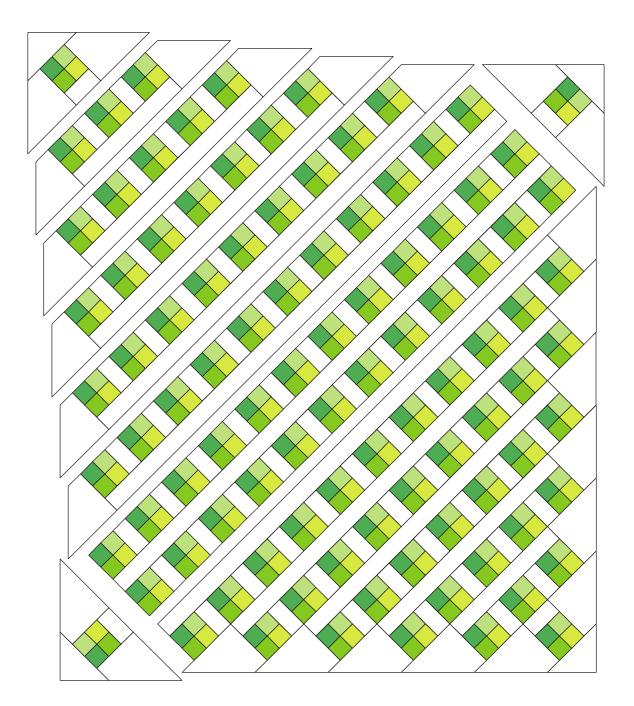

Assembly Diagram

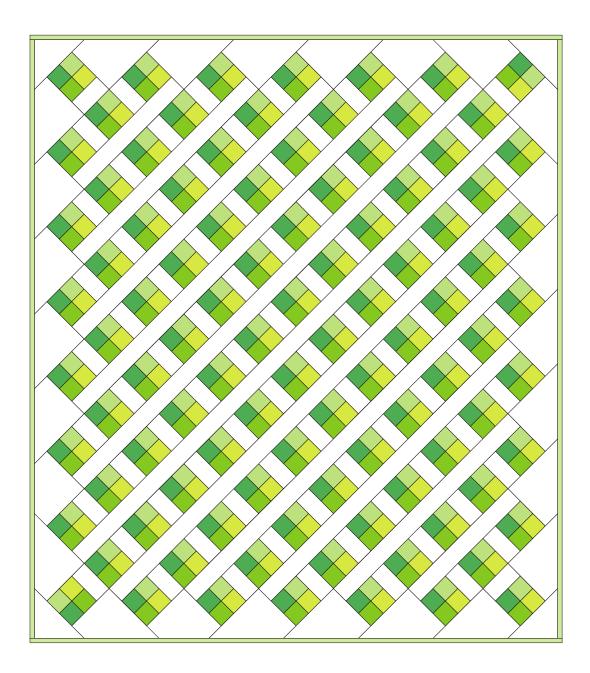

Quilt Diagram