


# CHANNEL ATTACH ALTERNATIVES

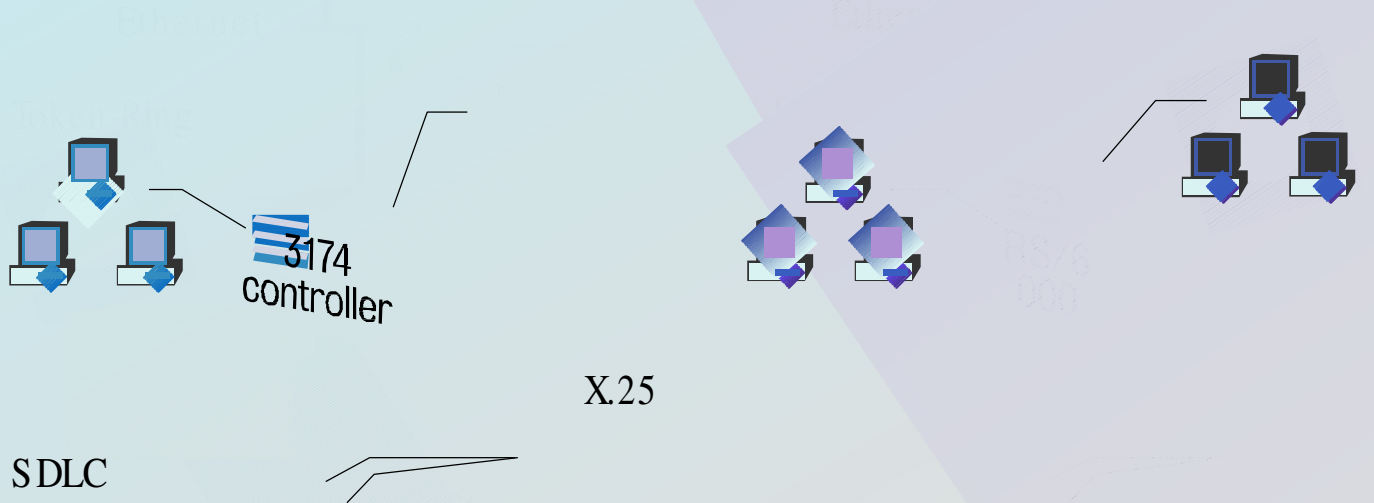

SDLC

X.25

ESCON at 10M bytes/sec. or 17M bytes/sec. block mux at 3M bytes/sec. or 4.5M bytes/sec.

The AT&SNA Server/6000 connects users running 3270 emulators or other applications to IBM mainframes using the same type of channel connections available in the 3174 Enterprise Controller. Unlike the 3174, the AT&SNA Server supports FDDI, but it does not support frame-relay connections.