


HOW TO PACK BINARY DATA INTO PAGING TRANSMISSIONS

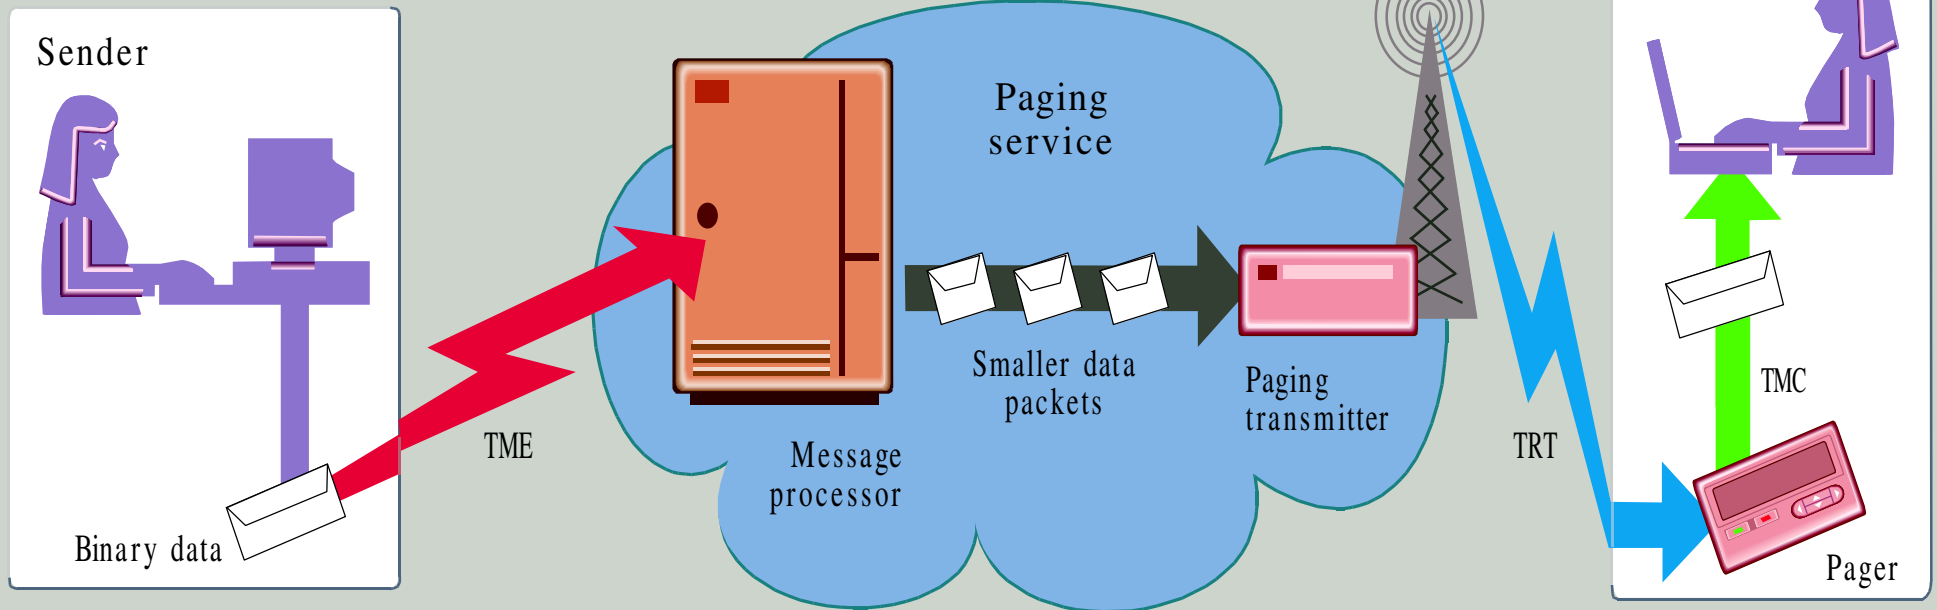

Sender uses TME (Telocator Message Entry) data-input protocol to send binary file to paging service.

Paging service breaks binary file into smaller data packets and transmits them via TRT (Telocator Radio Transport) protocol to pager.

Receiver's pager reassembles packets and transmits original message via TMC (Telocator Mobile Computer) protocol to mobile users.