




Four Port ISA RS-232 Interface for DOS, Windows 3.1x/95/NT, QNX, Linux, and OS/2



Model
OMG-VERSACOMM4-EX
\$199

- ✓ Four Port RS-232 Interface
- ✓ Each Port Designed to Maximize DOS and Windows 3.1x/95/NT Communications
- ✓ 16554 Buffered UART std/16654 Buffered UART Optional (64 byte FIFO)
- ✓ Supports Standard PC Data Rates and "Quad" Data Rates up to 460.8 Kbps
- ✓ Flexible Address Selection Via Dip-Switch
- ✓ Ten Interrupt Selections Including (3-7, 9-12, and 15)
- ✓ Interrupts Can be Shared or Individually Selected Per Port to Simplify Installation
- ✓ Onboard Interrupt Status Port Provides Efficient Interrupt Sharing
- ✓ Compatible with DOS, Windows 3.1x/95/NT, and Other Operating Systems
- ✓ INF Files for Windows 95, a Configuration Utility for Windows NT, and Help Files to Simplify Installation are Included

The OMG-VERSACOMM4-EX provides the PC with four RS-232 Async links to data collection equipment and other devices.

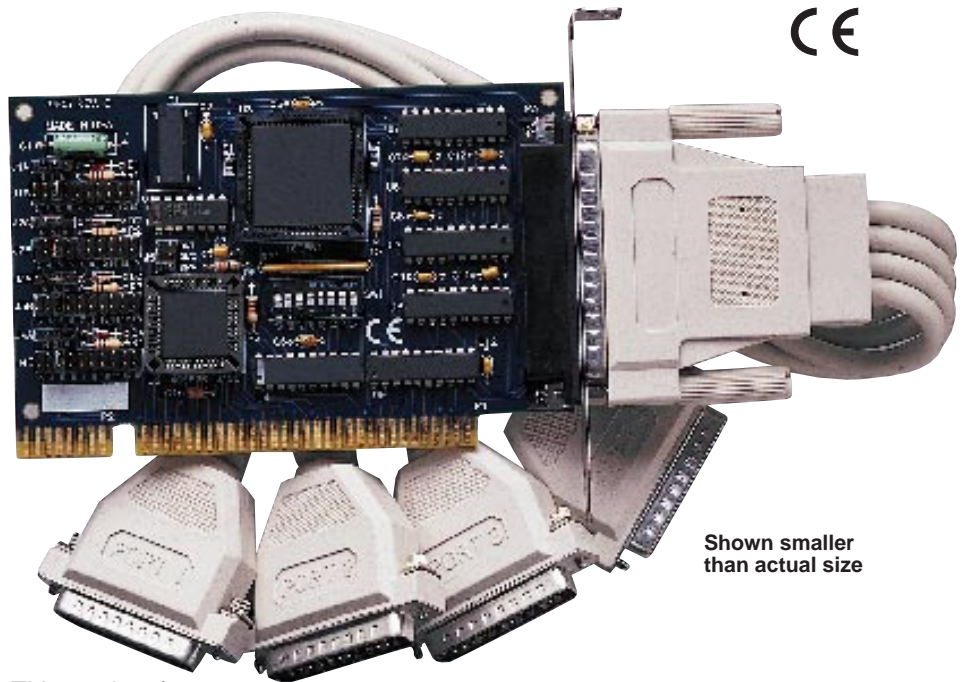

Shown smaller than actual size

This product features extended interrupt support, individually selectable or sharable interrupts, and an onboard interrupt status port for maximum Windows flexibility. Windows 3.1x and OS/2 drivers are optionally available for more than 4 COM: ports. Drivers are not required for Windows 95 or Windows NT.

A serial utility diskette is supplied with the OMG-VERSACOMM4-EX which includes all the Windows and DOS tools necessary to verify the installation and operation of the board. Windows utilities include .INF files for Windows installation and also a Windows NT COM: Port Installation Utility. DOS utilities include a diagnostic program to verify card address and examine the UART, a diagnostic serial loopback test program and an interrupt driven DOS serial port driver.

Specifications

Communications Chip:

16554 UART

Number of Ports: Four RS-232

Max. Data Rate: 460.8 Kbps

Max. Data Distance: up to 50ft.

Operating Temperature: 0 to 122°F (0 to 50°C)

Storage Temperature: -4 to 158°F (-20 to 70°C)

Humidity Range: 10-90% R.H.

Current Specifications:

+5V @ 210mA, ±12V @ 80mA ea.

Connector(s):

DB-37 to (4) DB-25P or DB-37 to (4) DB-9P

Cable Length: 36" (91.44 cm)

Physical Dimensions:

5.2" L x 3.4" H (13.21 x 8.64 cm)

To Order (Specify Model Number)

Model No.	Price	Description
OMG-VERSACOMM4-EX-DB25	\$199	Four port RS-232 interface (DB-25 cable included)
OMG-VERSACOMM4-EX-DB9	199	Four port RS-232 interface (DB-9 cable included)

Comes with complete operator's manual and serial utility disk.

To order with optional 16654 UART, add suffix "-SS" to part number and add \$20 to price.

Ordering Example: OMG-VERSACOMM4-EX-DB25-SS, four port RS-232 interface with DB-25 cable and 16654 UART upgrade, \$199 + 20 = \$219.