




Four Port PCI RS-232 Interface for DOS and Windows 3.1x/95/NT



Model
OMG-VERSACOMM4-PCI
\$249

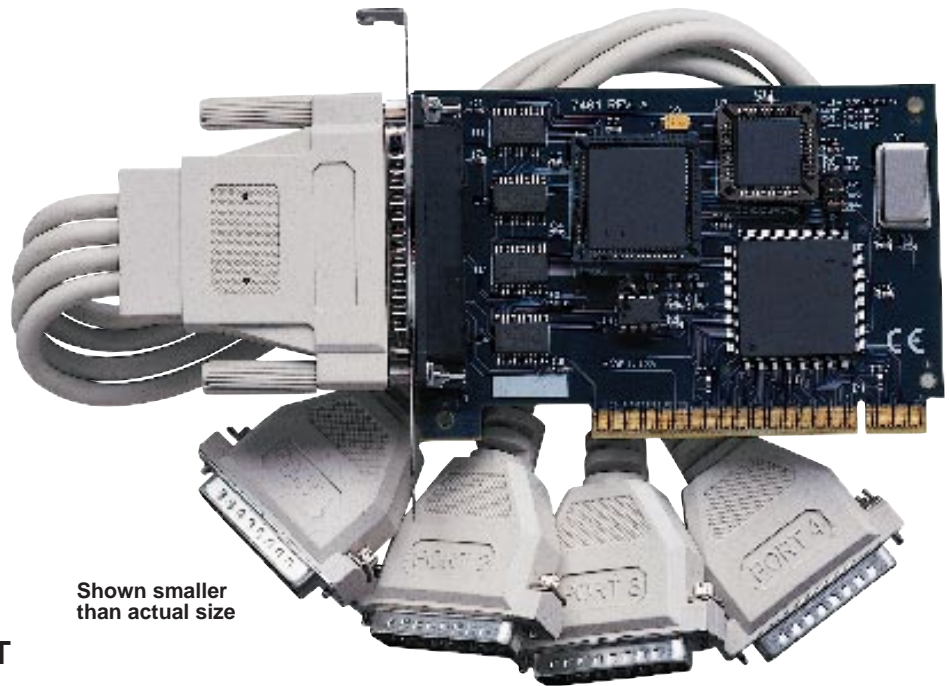

Shown smaller than actual size

- ✓ Four port RS-232 Interface
- ✓ Each Port Designed to Maximize DOS and Windows 3.1x/95/NT Communications
- ✓ 16554 Buffered UART std/16654 Buffered UART Optional (64 Byte FIFO)
- ✓ Supports Standard PC Data Rates and "Quad" Data Rates up to 460.8 kBPS
- ✓ Supports All PCI Interrupts
- ✓ Onboard Interrupt Status Port Provides Efficient Interrupt Sharing
- ✓ Compatible with DOS, Windows 3.1x/95/NT, and Other Operating Systems
- ✓ DOS Utilities, Windows 95 INF Files, Windows NT Driver/Utility, and Help Files are Included to Simplify Installation

applications running error free. The 16654 UART, featuring a deep 64 byte FIFO is optional for high speed applications. Windows 3.1x drivers are available for more than 4 COM: ports. Windows 95 automatically configures the OMG-VERSACOMM4-PCI, therefore drivers are not required. Drivers are provided for Windows NT.

A serial utility diskette is supplied with the OMG-VERSACOMM4-PCI which includes all the Windows and DOS tools necessary to verify the installation and operation of the board. Windows utilities include .INF files for Windows installation and also a Windows NT COM: Port Installation Utility. DOS utilities include a diagnostic program to verify card address and examine the UART, a diagnostic serial loopback test program and an interrupt driven DOS serial port driver.

Specifications

- Communications Chip:** 16554
- Number of Ports:** Four RS-232
- Max. Data Rate:** 460.8 kBPS
- Max. Data Distance:** Up to 50 ft.
- Operating Temperature:** 0 to 122°F (-18 to 50°C)
- Storage Temperature:** -4 to 158°F (-20 to 70°C)
- Humidity Range:** 10-90% R.H.
- Current Specifications:** +5V @ 250 mA, +12 V @ 60 mA, -12 V @ 100 mA
- Connector(s):** DB-37 to (4) DB-25P or (4) DB-9P
- Cable Length:** 36" (91.44 cm)
- Physical Dimensions:** 4.9" L x 3.3" H (12.45 x 8.38 cm)

The OMG-VERSACOMM4-PCI provides four PCI bus RS-232 Async links for communication servers, point of sale (POS) systems, and other data collection devices. The onboard interrupt status port provides maximum Windows flexibility. The OMG-VERSACOMM4-PCI includes the 16554 UART, providing a 16 byte FIFO to keep your datacom

To Order (Specify Model Number)		
Model No.	Price	Description
OMG-VERSACOMM4-PCI-DB25	\$249	Four port RS-232 interface (DB-25 cable included)
OMG-VERSACOMM4-PCI-DB9	249	Four port RS-232 interface (DB-9 cable included)

Comes with complete operator's manual and serial utility disk.

To order with optional 16654 UART, add suffix, "-SS" to part number and add \$20 to price.

Ordering Example: OMG-VERSACOMM4-PCI-DB25-SS, four port RS-232 interface with DB-25 cable and 16654 UART upgrade, \$249 + 20 = \$269.