




\$515
Model Shown



SPEC SHEET
PX61J

Interchangeable with
Model TH-FD4

PX61J Series
mV/V Output
0-50 to 0-15,000 psi
0-3.5 to 0-1000 bar

1 bar = 14.5 psi
1 kg/cm² = 14.22 psi
1 Atmosphere = 14.7 psi = 29.93 in-Hg = 760.2 mm-Hg = 1.014 bar

- ☑ Miniature Flush Diaphragm
- ☑ Hermetically Sealed in all Stainless Steel
- ☑ Flush Diaphragm for Precise Measurements

SPECIFICATIONS:

Electrical:

Excitation: 5 Vdc

Output: Ranges >100 psi: 2 mV/V ,
Range ≤100psi: 0.1 mV/psi @ 5Vdc

Bridge Resistance: 350 ohms

Zero Balance: ±1.0% FSO

Performance:

Accuracy Class: 1.0% Linearity & Hysteresis Combined

Shunt Calibration data included

Repeatability: 0.1% FSO

Environmental:

Operating Temperature Range:

-54 to +150°C (-65 to +300°F)

Compensated Temperature Range:

+16 to +71°C (+60 to +160°F)

Thermal Effects: Span and Zero

Combined: ±0.02% FSO/°F

Pressure:

Proof Pressure: 150% of capacity

Burst Pressure: 400% of capacity or 30,000 psi whichever is less


For Sales and Service
In U.S.A. and Canada

1-800-872-3963
1-800-USA-DYNE

International Customers Dial
(614) 965-9340
24-Hour FAX (614) 965-9438

OMEGADYNESM FAX
OMEGADYNE's 24-Hour
On-Line Publishing Service
1-800-344-3963
1-800-DIG-DYNE
Document # 3622


OMEGADYNE, Inc.
149 Stelzer Court, Sunbury, OH 43074
<http://www.omegadyne.com>
e-mail: info@omegadyne.com



© COPYRIGHT 1996 OMEGADYNE, INC. ALL RIGHTS RESERVED.

Miniature Pressure Transducer

7/16-20 UNF Pressure Connection

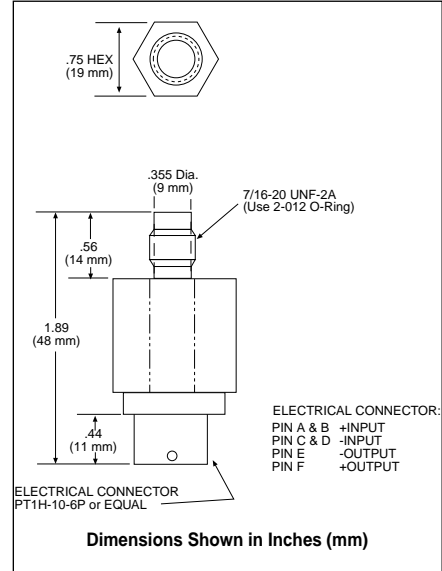


Mechanical:

Electrical Connections: PT1H-10-6P

Mating Connector: PT06F-10-6S
(not included)

Pressure Connection: 7/16-20 UNF-2A
(Use 2-012 O-ring)

Wetted Parts: 17-4 PH Stainless Steel

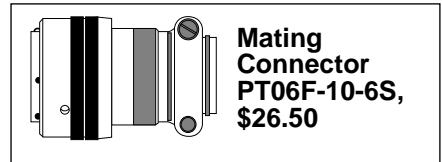

► **Most Popular Models Highlighted** ◀

Prices Shown in U.S. Dollars

To Order: (Specify Model Number)			
Range (psi)	Model Number	Price	Compatible Meters
Absolute Pressure (All Ranges Available in Absolute Pressure)			
0-50	PX61J1-050AV	\$515	INFS, INFCS
0-100	PX61J1-100AV	515	INFS, INFCS
Gage Pressure (All Ranges Also Available in Sealed Gage Pressure)			
0-50	PX61J1-050GV	515	INFS, INFCS
0-100	PX61J1-100GV	515	INFS, INFCS
0-150	PX61J1-150GV	515	INFS, INFCS
0-200	PX61J1-200GV	515	INFS, INFCS
0-300	PX61J1-300GV	515	INFS, INFCS
0-500	PX61J1-500GV	515	INFS, INFCS
0-1,000	PX61J1-1KGV	515	INFS, INFCS
0-2,500	PX61J1-2.5KGV	515	INFS, INFCS
0-5,000	PX61J1-5KGV	515	INFS, INFCS
0-10,000	PX61J1-10KGV	515	INFS, INFCS
0-15,000	PX61J1-15KGV	515	INFS, INFCS

Interchangeable with Model TH-FD4

Metric Ranges Available - Consult Engineering

To order Sealed Gage Pressure models, change the "G" in the model number to "S" No charge.
To order Absolute Pressure models, change the "G" in the model number to "A" No charge.

Ordering Examples: 1.) **PX61J1-100AV** is a 100 psi Absolute Pressure transducer with PT1H-10-6P electrical connection and 7/16-20 UNF male pressure port, \$515 ea. Mating connector, **PT06F-10-6S \$26.50** (not included). 2.) **PX61J1-300SV** is a 300 psi Sealed Gage Pressure transducer with PT1H-10-6P electrical connection and 7/16-20 UNF male pressure port, \$515 ea. Mating connector, **PT06F-10-6S \$26.50** (not included). Printed On Recycled Paper

