


In addition to the standard Ethernet controller, the Model 715/75 and 725/75 also provide FDDI, SNA, X.25, IEEE 802.3, (IBM) Token Ring IEEE 802.5, HP-IB and Apollo Token Ring interfaces through the EISA bus. For a complete list of EISA options with product numbers, please refer to the Prices and Configurations Guide.

The following table summarizes the standard network support for the Model 715/75 and 725/75.

Model 715/75 and 725/75 Network Support	
LAN Type Connector	IEEE 802.3 LAN ThickLAN AUI
Data Rate	10Mbits/sec
Standard HP-UX Networking Software Services	NCS, NFS BSD 4.3 TCP/IP Services BSD 4.3 Network Services ARPA Services

The following illustration depicts the back panel of the Model 715/75 with standard I/O and LAN connectors.

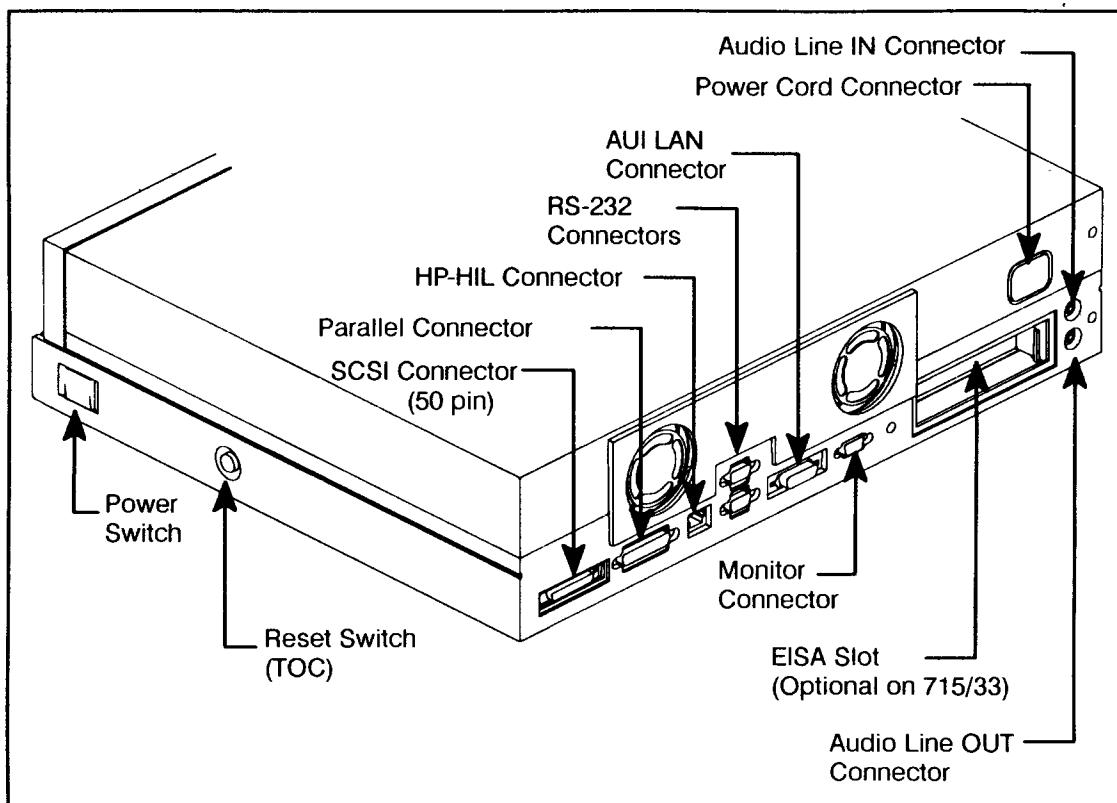

Model 715 Back Panel

HP and HP Channel Partner Internal Use Only