

KazPhone 2.1 Help Contents



[Overview](#)



[Getting Started](#)



[Main Window](#)



[Post Office Bar Code](#)



[Return Address Bitmap](#)



[Registration Information](#)



[License Agreement](#)



[Disclaimer of Warranty](#)



[Product Information](#)



KazPhone 2.1 Overview

KazPhone is a simple application allows you to easily manage phone and address information for your family, friends, and business associates. It provides the following features:

- Separate records are kept for people, marriages, addresses, and zipcodes which eliminates duplicate data entry.
- Up to four different addresses can be defined for each person.
- Envelopes of any size can be easily printed for anyone in the database. The envelope includes the postal bar code to speed processing, and can be customized with your return address, font, and bitmap.
- A birthday and anniversary list can be printed or copied to your favorite word processor.
- A personal phone book can be printed.
- The program can search the included database of 42,490 zip codes, saving you time.
- Dates can be shown 40 different formats.

Related Topics
[Getting Started](#)

1
2
3

Getting Started

To get started using **KazPhone** follow these steps:

- 1) Use the New command to create a new KazPhone file.
- or -
Use the Open command to open the sample KazPhone file named `SAMPLE.KZP`.
- 2) Push the Add button to display the Person Dialog and add your first person.
- 3) For the person's current address, you will have to enter a new one since there aren't any to choose from in the database yet. Enter the street address and press the tab key. This displays the Address Dialog where you can fill in the rest of the address.
- 4) For the city, state, and zip code of this new address, you will have to enter a new one since there aren't any to choose from in the database yet. Enter the five digit zip code and press the tab key. This displays the Zip Code Dialog with the city and state filled in if possible.
- 5) Hit the OK button in each of the three dialog boxes. Your new person, address, and zip code have been added to the database.
- 6) Save your database to disk using the SaveAs command.


General Tips & Hints

- Avoid entering duplicate records. Check the existing records in the combo box for a match before defining a new record.
- When a family moves, simply edit their address to reflect the move. Since all of the family members and the marriage are linked to this address, they are automatically updated.
- Use the Print Book command to print a personal phone book to keep close to your phone.
- Use the Font button to define a different font or color to make your printed envelopes unique.
- Use the Options Date Format command to change the format used to display all dates.
- Save your work often and keep backups.



Main Window

The main window of **KazPhone** is shown below. Click on any part of the window to get more help on that particular item.

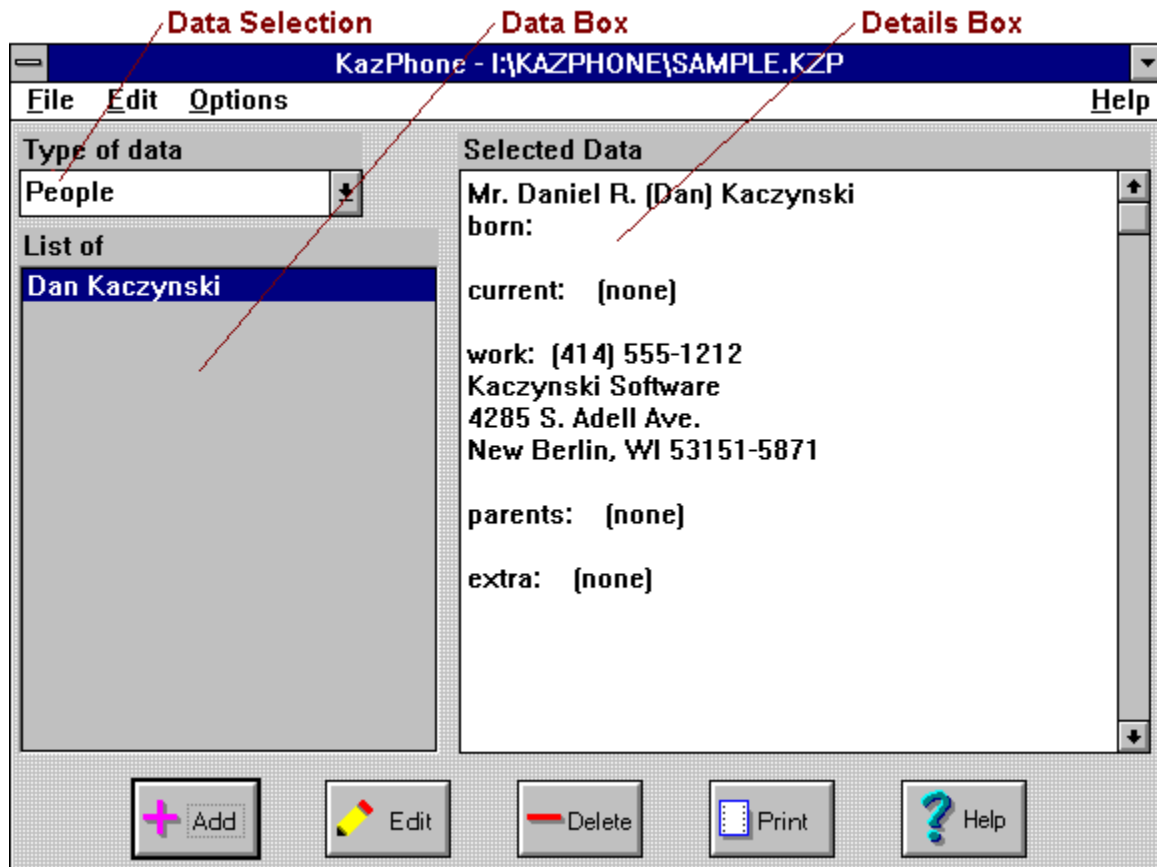

Main Window - Data Selection

Use this pull down list to select the type of item that you want shown in the data box and detail box. Your choices are people, addresses, marriages, zipcodes, birthdays, or anniversaries.

Related Topics

Main Window

Main Window - Data Box

This box shows all data items of a particular type, depending on the [data selection](#) box.

When a particular record is selected, the details for that record are shown in the [detail box](#). Also, the [Add](#), [Edit](#), [Delete](#), and [Print](#) buttons apply to the selected record.

Related Topics

[Main Window](#)

Main Window - Detail Box

This box shows the details of the record selected in the [data box](#). Any or all text in this box can be selected and copied to the clipboard for use in other applications.

Use the [Print](#) button to print information from the detail box.

To change the format for any dates shown in this box, use the [Date Format](#) command.

Related Topics

[Main Window](#), [Print Button](#), [Select All Command](#)

Main Window - Print Button

Use this button to print information from the details box, depending on the data selection:

People, Addresses, Marriages

By default, an envelope is printed with the first address shown in the details box. If a different address is desired, select it first before using the print button.

Birthdays, Anniversaries

The entire list is printed in the default font. To print only a portion of the list or to use different print characteristics, use the Select All command followed by the Copy command to copy the entire list to the clipboard. Then paste it into your favorite word processor and print it from there.

Related Topics

Main Window

Main Window - Add Button

Use this button to add a new record to the database. The data selection box determines the type of record that is added.

Related Topics

Main Window

Main Window - Edit Button

Use this button to edit the record that is currently highlighted in the data box.

Related Topics

Main Window

Main Window - Delete Button

Use this button to delete the record that is currently selected in the data box. **Caution:** Once a record is deleted, it cannot be restored. After pressing the delete button you must confirm that the correct record is being deleted.

Related Topics

Main Window



Post Office Bar Code

KazPhone automatically prints a bar code on the envelope which the post office uses to route your letter. The bar code represents the five or nine digit zip code that the letter is addressed to. This feature can be enabled or disabled using the Envelope command.



Return Address Bitmap

KazPhone can print a bitmap to the left of the return address. To choose a bitmap, use the [Bitmap File](#) command to select an existing bitmap file. To print without a bitmap, use the [Clear Bitmap File](#) command. To edit or view the bitmap, use the [Edit Bitmap File](#) command.

You can use the Windows Paintbrush application, or any other bitmap editor, to create a bitmap file. For best results, use a monochrome bitmap for a single color printer.

The size of the printed bitmap varies depending on the resolution of your printer. For example, if your laser printer has a resolution of 300 dots per inch, then a 300x300 bitmap is printed in a one inch square on your envelope. If your dot matrix printer has a resolution of 180 dots per inch, then a 180x180 bitmap is printed in a one inch square. You may wish to experiment with different size bitmaps to get the results that you want.

In the current version of KazPhone, a bitmap is not printed if the envelope is rotated.



KazPhone Registration

There are two versions of **KazPhone** - demonstration and registered. (Use the About command from the Help menu to determine which version you have.) The demonstration version contains the same features found in the registered version. However, the demonstration version runs for a maximum of one hour at a time.

You may use the demonstration version of **KazPhone** for up to fifteen days to evaluate the software. After these fifteen days, the program must be registered with **Kaczynski Software** if you continue to use it.

To register **KazPhone**, print a registration form using the Print Registration Form command from the File menu. Fill out the form and send it to **Kaczynski Software** with your registration fee of only \$10. You will receive the registration number to register your copy. In addition, you will receive a disk with the most recent version of **KazPhone** if you do not already have it.

Related Topics

License, Disclaimer of Warranty

New Command (File Menu)

Use this command to create a new KazPhone file. If the current file has not been saved, you are prompted to save the file before a new one is created.

Related Topics

Open Command, KazPhone File

Open Command (File Menu)

Use this command to bring an existing [KazPhone file](#) into the editor. If the current file has not been saved, you are prompted to save the file before a new one is opened.

Related Topics

[New Command](#), [KazPhone File](#)

Automatic File Open

You can start **KazPhone** with your data file automatically opened in one of two ways:

- When defining the **KazPhone** item in Program Manager, add the file name (including drive and directory) after the program name in the "command line" box. Be sure to include a space between the two.
- Double click on any [KazPhone file](#) in the File Manager.

Related Topics

[Open Command](#), [KazPhone File](#)

Save Command (File Menu)

Use this command to replace the contents of the current [KazPhone File](#).

Related Topics

[SaveAs Command](#), [KazPhone File](#)

SaveAs Command (File Menu)

Use this command to save the current data with a new file name. You may wish to use the default KazPhone extension of .KZP so that the file is recognized as a KazPhone file by the file manager.

Related Topics

Save Command, KazPhone File

Copy Command (Edit Menu)

Use this command to copy the selected text in the details box to the clipboard.

Related Topics

Select All Command, Main Window

Select All Command (Edit Menu)

Use this command to select all text in the details window.

Related Topics

Copy Command, Print Button

Envelope Command (Options Menu)

Use this command to display the [Envelope Options Dialog Box](#) to define the envelope size and rotation.

[Related Topics](#)

[Print Button](#)

Print Book Command (File Menu)

Use this command to print a personal phone book that includes all names and addresses.

Bitmap File Command (Options Menu)

Use this command to select the bitmap that should be printed in the upper left corner of the envelope next to the return address. To view or edit the bitmap file, use the [Edit Bitmap](#) command.

Related Topics

[Clear Bitmap File Command](#), [Edit Bitmap File Command](#), [Return Address Bitmap](#)

Clear Bitmap File Command (Options Menu)

Use this command to specify that a bitmap should not be printed on the envelope.

Related Topics

[Bitmap File Command](#), [Edit Bitmap](#), [Return Address Bitmap](#)

Date Format Command (Options Menu)

Use this command to display the [Date Format Dialog](#) and choose a new format to display dates. After the format is selected, it is saved in the configuration file and used to display all dates.

Related Topics

[Date Format Dialog](#)

Address Font Command (Options Menu)

Use this command to choose the font used to display and print the address on the envelope. This command is equivalent to the [Font button](#) in the [Print Envelope Dialog Box](#).

Related Topics

[Return Address Font](#)

Return Address Font Command (Options Menu)

Use this command to choose the font used to display and print the return address on the envelope.

Related Topics

[Address Font Command](#)

Edit Bitmap File Command (Options Menu)

Use this command to view or edit the bitmap that will be printed on the envelope.

By default, the Windows Paintbrush tool is used. However, a different bitmap editor can be specified in file KAZPHONE.INI. Edit file KAZPHONE.INI and change or add the following line under the {Options} section:

`BitmapFile=pbrush.exe`

Replace file "pbrush.exe" with the executable file for your editor. Be sure to include the drive and directory path. Do not use any quotes.

Related Topics

[Bitmap File Command](#), [Clear Bitmap](#), [Return Address Bitmap](#)

KazPhone Files

KazPhone opens and saves the phone book data in a special file that only KazPhone understands. Although any file extension can be used, KazPhone uses a default file extension of ".KZP".

The benefit of saving files with the KazPhone file extension is that they can be opened directly into KazPhone by double clicking on the file name in either the File Manager or Program Manager.

Related Topics

[Open Command](#), [SaveAs Command](#), [Automatic File Open](#)

Address Dialog Box

Click on any field in the dialog box shown below for additional help.

Edit Existing Address

Phone Number
[414] 555-1212

Address
Kaczynski Software
4285 S. Adell Ave.

City, State Zip **Zip+4**
New Berlin, WI 53151 5871

OK
Cancel
Help

Zip+4 (Address Dialog)

Use this field to enter the last four digits of the nine digit zip code. If you do not know what the extended zip code is, enter 0000. This information is used to print the bar code on envelopes.

Related Topics
[Address Dialog](#)

Phone Number (Address Dialog)

Use this field to enter the phone number at this address. Enter the number in the form

(000) 000-0000

Related Topics
[Address Dialog](#)

Street (Address Dialog)

Use this field to enter the number and street of the address. Up to 250 characters can be entered on several lines. If this is a business address, you may wish to include the company name on the first line of this field.

Related Topics
[Address Dialog](#)

City, State, Zip Code (Address Dialog)

Use this combo box to select the city, state, and zip code from the list already entered in the database. The list is sorted by zip code.

If the city, state, and zip code is not in the list, enter the new information in the box. When you move off of this field, the Zip Code dialog box appears so that you can confirm the addition of a new zip code to the database.

Shortcut:

Instead of searching through the list, enter just the five digit zip code and tab to the next field. The program automatically searches for a match to this zip code from your database, or it presents the Zip Code dialog box so that you can define a new zip code.

Related Topics

Address Dialog, Zip Code Dialog

Marriage Dialog Box

Click on any field in the dialog box shown below for additional help.

The dialog box is titled "Add New Marriage" and is divided into several sections:

- Husband:** A dropdown menu with the value "(none)".
- Wife:** A dropdown menu with the value "(none)".
- Anniversary:** An empty text input field.
- Home Address:** A dropdown menu with the value "(none)".
- Children:** A vertical list of six dropdown menus, each with the value "(none)".

At the bottom of the dialog box, there are three buttons: "OK" (with a green checkmark icon), "Cancel" (with a red X icon), and "Help" (with a blue question mark icon).

Anniversary (Marriage Dialog)

Use this field to enter the couple's anniversary, if known. The Date Dialog box is used to enter dates. The format of the date can be changed with the Date Format command.

Related Topics
Marriage Dialog

Children (Marriage Dialog)

Use these combo boxes to define the children for this couple. When a new child is born, type in the new name and tab to the next field. The Person Dialog box appears so that you can define a new person.

Related Topics
Marriage Dialog

Home Address (Marriage Dialog)

Use this combo box to select the home address for this couple from the list of addresses in the database. If their address has not been entered yet, you can enter it here. After you tab to the next field, the Address Dialog box appears so that you can define the new address.

Related Topics
Marriage Dialog

Husband (Marriage Dialog)

Use this combo box to select the husband in this marriage.

Related Topics
[Marriage Dialog](#)

Wife (Marriage Dialog)

Use this dialog box to select the wife in this marriage.

Related Topics
[Marriage Dialog](#)

Person Dialog Box

Click on any field in the dialog box shown below for additional help.

Edit Existing Person			
Title	First	Middle	Last
<input type="text" value="Mr"/>	<input type="text" value="Daniel"/>	<input type="text" value="R."/>	<input type="text" value="Kaczynski"/>
Common Name		Birthday	
<input type="text" value="Dan"/>		<input type="text"/>	
Current Address			
<input type="text" value="(none)"/>			
Work Address			
<input type="text" value="53151 : Kaczynski Software; 4285 S. Adell Ave."/>			
Parents Address			
<input type="text" value="(none)"/>			
Extra Address			
<input type="text" value="(none)"/>			
<input type="button" value="OK"/>			
<input type="button" value="Cancel"/>			
<input type="button" value="Help"/>			

Title (Person Dialog)

Use this field to enter the person's title, such as Mr, Ms, Dr, etc.

Related Topics

Person Dialog

First Name (Person Dialog)

Use this field to enter the first name of the person.

Related Topics

[Person Dialog](#), [Common Name](#)

Middle Name (Person Dialog)

Use this field to enter the middle name or initial of the person.

Related Topics

[Person Dialog](#)

Last Name (Person Dialog)

Use this field to enter the last name of the person.

Related Topics

Person Dialog

Birthday (Person Dialog)

Use this field to enter the person's birthday, if known. The Date Dialog box is used to enter dates. The format of the date can be changed with the Date Format command.

Related Topics

Person Dialog

Current Address (Person Dialog)

Use this combo box to select the current address for the person. To add a new address, enter the street information and tab to the next field. The Address Dialog box is shown, and you can define the new address.

Related Topics

Person Dialog

Work Address (Person Dialog)

Use this combo box to select the work address for the person. To add a new address, enter the street information and tab to the next field. The Address Dialog box is shown, and you can define the new address.

Related Topics

Person Dialog

Parents' Address (Person Dialog)

Use this combo box to select the parents' address for the person. To add a new address, enter the street information and tab to the next field. The Address Dialog box is shown, and you can define the new address.

Related Topics

Person Dialog

Extra Address (Person Dialog)

Use this combo box to select an extra address for the person. To add a new address, enter the street information and tab to the next field. The Address Dialog box is shown, and you can define the new address.

Related Topics

Person Dialog

Common Name (Person Dialog)


Use this field to enter the common first name of the person. For example, if the person's first name is Daniel, you might enter Dan in this field.

Related Topics





Person Dialog, First Name

Zip Code Dialog Box

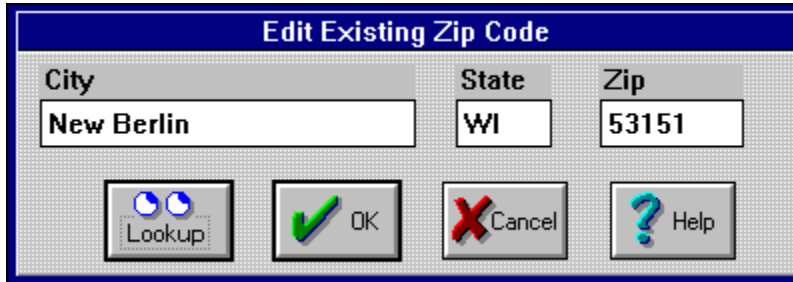Click on any field in the dialog box shown below for additional help.



City	State	Zip
New Berlin	WI	53151

Buttons:    

City (Zip Code Dialog)

Use this field to enter the city that corresponds to the zip code. Sometimes this field can be filled in automatically by using the Lookup button.

Related Topics
Zip Code Dialog

State (Zip Code Dialog)

Use this field to enter the state that corresponds to the zip code. Sometimes this field can be filled in automatically by using the Lookup button.

Related Topics
Zip Code Dialog

Zip Code (Zip Code Dialog)

Use this field to enter the five digit zip code that corresponds to the city and state. Sometimes this field can be filled in automatically by using the Lookup button.

Related Topics
[Zip Code Dialog](#)

Lookup City, State, Zip Code (Zip Code Dialog)

Use this button to look up zip code information in the [KazPhone](#) database.

If you fill in the city and state fields and enter 00000 as the zip code, the zip code is filled in. **Caution:** Many cities have more than one zip code. The lookup button finds only the first zip code for that city, which may or may not be correct.

If you fill in the zip code fields and leave the city and state fields blank, the city and state fields are filled in. **Caution:** Some smaller communities share the same zip code. The lookup button finds the first city assigned to that zip code. You can enter multiple cities and states with the same zip code in [KazPhone](#).

If you use the lookup button and the blank field is filled in with a question mark, the program could not find a match. Check the spelling of the city and the state abbreviation. If the zip code is still not found, it may be new. To include it in a future release, send the new zip code to:


Kaczynski Software
4285 S. Adell Ave.
New Berlin, WI 53151-5871

If your zip code was not found, you can take \$1 off of your registration fee of [KazPhone!](#)

Related Topics
[Zip Code Dialog](#)

Date Dialog Box

Click on the field in the box below for help on that field.

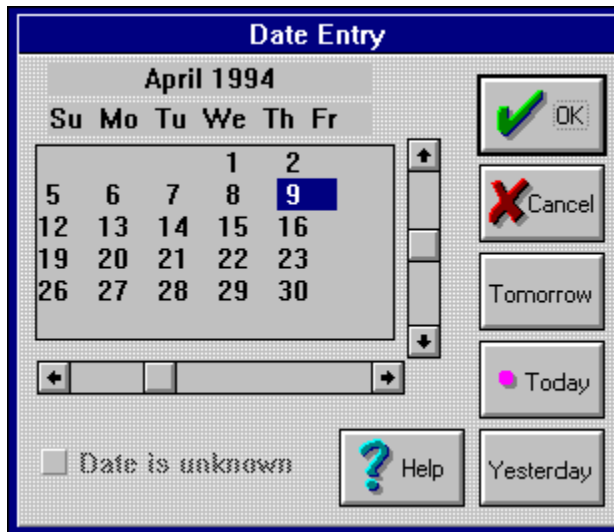

Calendar (Date Dialog Box)

The selected date is highlighted on the calendar. Use the vertical scroll bar to change the year. Use the horizontal scroll bar to change the month. Use the mouse to select a different day of the month.

Today, tomorrow, or yesterday can be selected using the buttons provided.

Related Topics

[Date Dialog Box](#)

Unknown Date (Date Dialog Box)

Check this box if the date is unknown.

Related Topics
[Date Dialog Box](#)

Today Button (Date Dialog Box)

Use this button to set the calendar to today.

Related Topics

[Date Dialog Box](#)

Yesterday Button (Date Dialog Box)

Use this button to set the calendar to yesterday.

Related Topics
[Date Dialog Box](#)

Tomorrow Button (Date Dialog Box)

Use this button to set the calendar to tomorrow.

Related Topics

[Date Dialog Box](#)

Time Dialog Box

Click on the field in the box below for help on that field.



The image shows a 'Time Entry' dialog box with a blue title bar. It contains two input fields for 'Hour' (09) and 'Minutes' (59), a list of time periods (AM, PM, military) with radio buttons, and three buttons at the bottom: 'OK' (with a green checkmark), 'Cancel' (with a red X), and 'Help' (with a blue question mark).

Hour	Minutes
09	59

AM
 PM
 military

Hour (Time Dialog Box)

Use this field to specify the hour.

Related Topics
[Time Dialog Box](#)

Minute (Time Dialog Box)

Use this field to specify the minutes.

Related Topics
[Time Dialog Box](#)


AM/PM (Time Dialog Box)

Use this field to specify whether the hour refers to AM, PM, or military time.

Related Topics
[Time Dialog Box](#)

Date Format Dialog Box

Click on the field in the box below for help on that field.

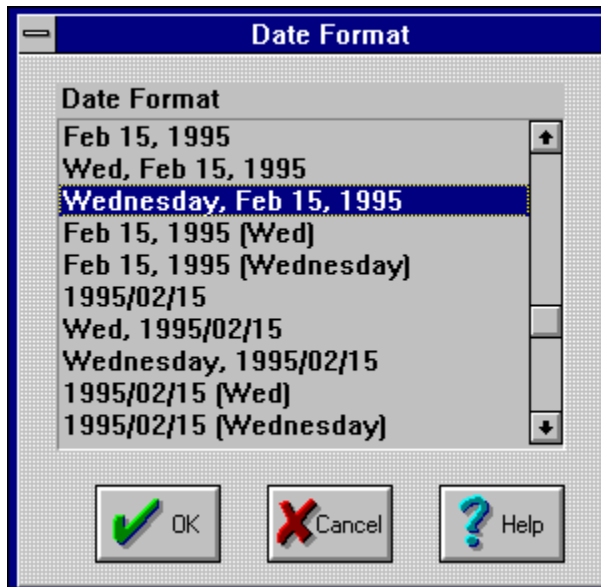

List of Date Formats (Date Format Dialog Box)

Select the date format that you want the program to use from the list shown. Your choice will be saved in the configuration file and used to display all dates in the program.


Related Topics

[Date Format Dialog Box](#)




Kaczynski Software Products


These are some of the programs available from [Kaczynski Software](#):

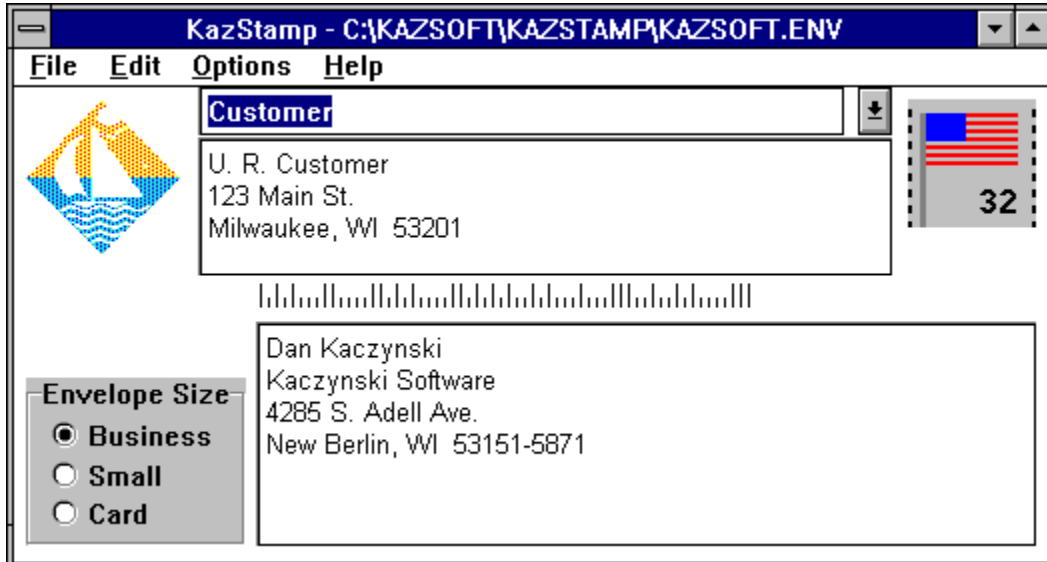


KazStamp makes it easy to print envelopes (including a return address, bitmap, and post office bar code) from a text file or any Windows word processor. The font and print area can be customized to fit any envelope.

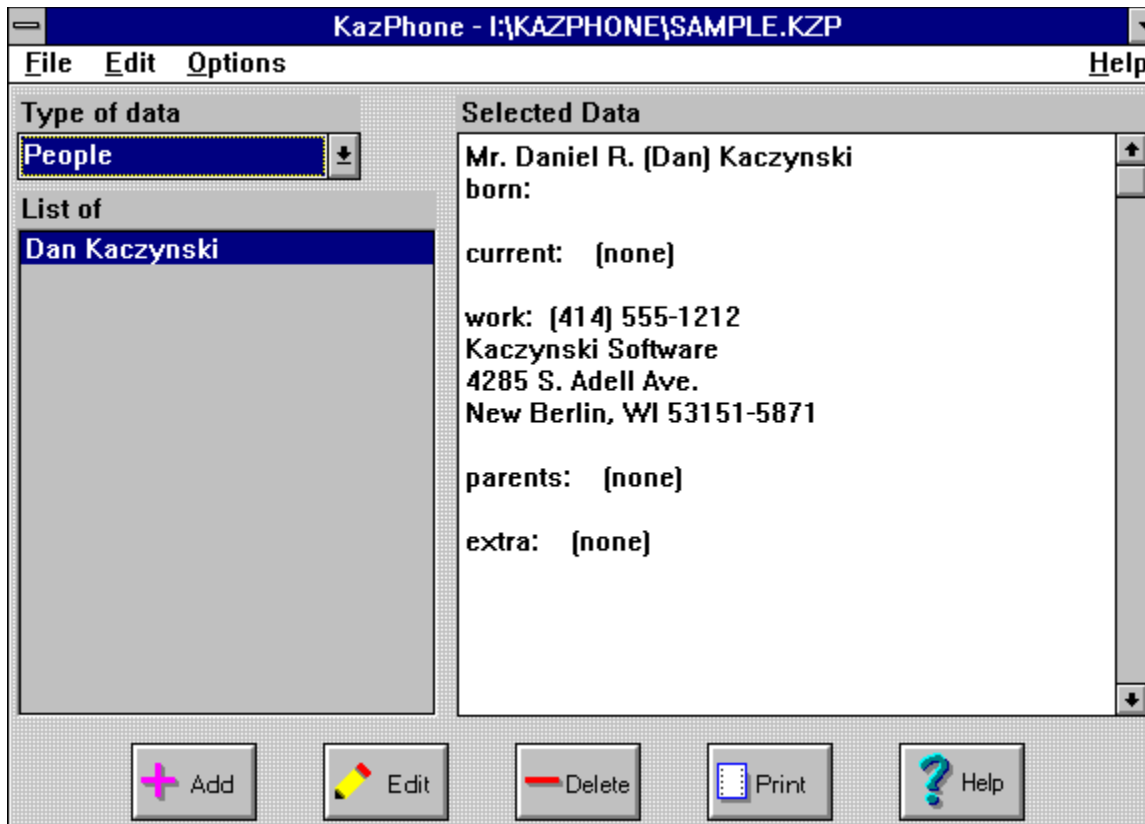


KazPhone makes it easy to maintain a personal phone book and use it to print envelopes customized with color, fonts, a return address, bitmap, and post office bar code. The program also keeps track of birthdays and anniversaries and can print a personal phone book.

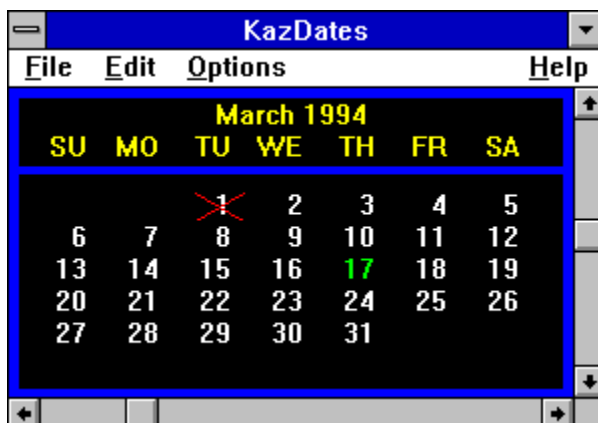

KazDates provides a monthly calendar with scroll bars to easily change the month and year. Most of the display attributes can be customized.

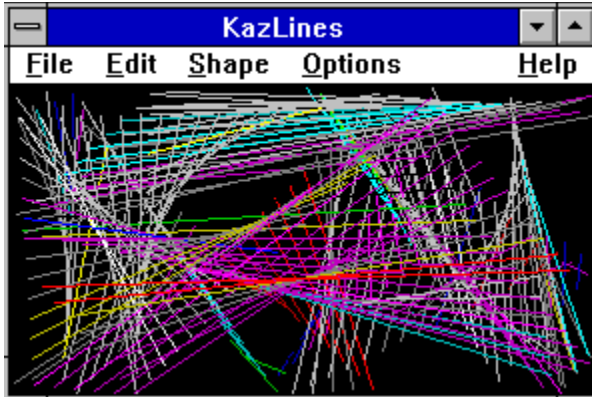

KazLines creates an image that continuously changes shape, size, and color. Different images can be created by selecting one of nine different shapes and changing the line and color characteristics.

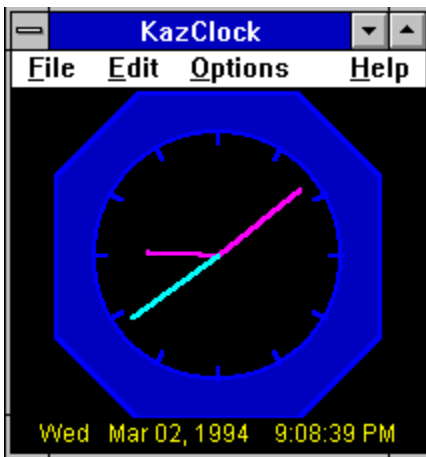

KazClock provides an on screen clock with the ability to customize all colors. A built in alarm reminds you about important events.



Disclaimer of Warranty

This software and documentation are provided **"as is"** and without warranties as to performance, merchantability, fitness for particular purpose, or any other warranties whether expressed or implied. The user assumes the entire risk of using this program. In no event will liability for any damages ever exceed the registration fee paid for the license to use the software, regardless of any form of the claim.

See Also

[License Agreement](#)

[Registration](#)



License Agreement

This software and documentation is owned and copyrighted by Daniel R. Kaczynski and [Kaczynski Software](#). You may use the demonstration version of the software and documentation for up to fifteen days without cost or obligation. After these fifteen days, you must register the software if you wish to continue using it. After the registration fee has been paid to [Kaczynski Software](#), you are entitled to unlimited use of one copy of the registered version of the software and documentation for the current and any future versions of the software.

See Also

[Registration](#)

[Disclaimer of Warranty](#)

Print Registration Form Command (File Menu)

Use this command to print a copy of the registration form.

See Also

[Registration](#)

[Registration Command](#)

[Registration Dialog Box](#)

Register Command (File Menu)

Use this command to register your copy of the program with the [Registration Dialog Box](#).

See Also

[Registration](#)

[Registration Dialog Box](#)

[Print Registration Form](#)

Exit Command (File Menu)

Use this command to save the current configuration and stop the program.

Print Setup Command (File Menu)

Use this command to modify the current printer settings.

OK Button

Use this button to accept the entries made in the dialog box.

Cancel Button

Use this button to close the dialog box without saving any changes.

Help Button

Use this button to display this help page.

Print Envelope Dialog Box

Click on the field in the box below for help on that field.

The dialog box is titled "Print Envelope" and contains the following elements:

- Sender Address:** Kaczynski Software, 4285 S. Adell Ave., New Berlin, WI 53151
- Country:** United States (indicated by a flag icon and the number 32)
- Recipient Address:** U. R. Customer, 123 Main St., Anytown, XX 12345
- Print Specification:**
 - Small Envelope
 - Business Envelope
 - Greeting Card
 - Label Batch
- Control Buttons:**
 - Set Up... (wrench icon)
 - Fonts... (font icon)
 - Option (list icon)
 - OK (checkmark icon)
 - Cancel (X icon)
 - Help (question mark icon)

Envelope Size (Print Envelope Dialog Box)

Check the box that matches the size of your envelope. The default sizes (in inches) are:

Small Envelope	5 ³ / ₄ "	x	3 ¹ / ₂ "
Business Envelope	9"	x	3 ³ / ₄ "
Greeting Card	7"	x	5"

However, these values can be changed by using the [Option Button](#).

Related Topics

[Print Envelope Dialog Box](#)

Addressee (Print Envelope Dialog Box)

Enter the name and address that the envelope should be addressed to. The font can be changed by hitting the [Font Button](#).

Related Topics

[Print Envelope Dialog Box](#)

Return Address (Print Envelope Dialog Box)

Enter the return name and address. The name and address you enter are saved in the .INI file. The font can be changed by hitting the Font Button.

Related Topics

[Print Envelope Dialog Box](#)

Font Button (Print Envelope Dialog Box)

Use this button to select the font used to print the address on the envelope.

Related Topics

[Print Envelope Dialog Box](#)

Option Button (Print Envelope Dialog Box)

Use this button to display the Envelope Options Dialog Box and set the printer parameters for envelope size and rotation.

Related Topics

Print Envelope Dialog Box

Setup Button (Print Envelope Dialog Box)


Use this button to define the printer to use to print the envelope.

Related Topics

[Print Envelope Dialog Box](#)

Envelope Options Dialog Box

Click on the field in the box below for help on that field.

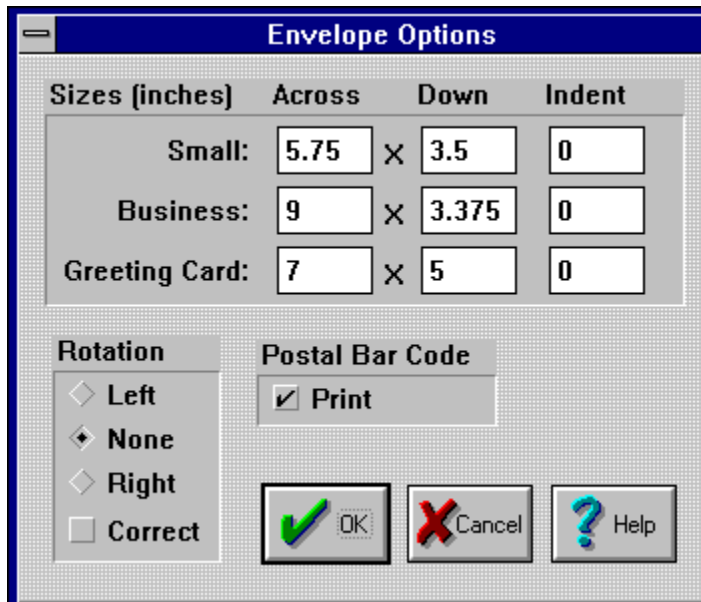

The dialog box is titled "Envelope Options" and contains the following elements:

Sizes (inches)	Across	Down	Indent	
Small:	<input type="text" value="5.75"/>	×	<input type="text" value="3.5"/>	<input type="text" value="0"/>
Business:	<input type="text" value="9"/>	×	<input type="text" value="3.375"/>	<input type="text" value="0"/>
Greeting Card:	<input type="text" value="7"/>	×	<input type="text" value="5"/>	<input type="text" value="0"/>

Rotation options:

- Left
- None
- Right
- Correct

Postal Bar Code options:

- Print

Buttons:

- (with a green checkmark icon)
- (with a red X icon)
- (with a blue question mark icon)

Horizontal Size (Envelope Options Dialog Box)

Use this field to specify the number of inches across that is available for printing on the envelope. You may wish to specify a number less than the actual width of the envelope if your printer cannot print all the way to the edge.

Related Topics

[Envelope Options Dialog Box](#)

Vertical Size (Envelope Options Dialog Box)

Use this field to specify the number of inches down that is available for printing on the envelope. You may wish to specify a number less than the actual height of the envelope if your printer cannot print all the way to the bottom.

Related Topics

[Envelope Options Dialog Box](#)

Indent (Envelope Options Dialog Box)

Use this field to specify the number of inches that all printing should be shifted to the right on your printer. This field may be needed if you are rotating the envelope and it does not feed on the left margin of the printer.

Related Topics

[Envelope Options Dialog Box](#)

Print Bar Code (Envelope Options Dialog Box)

Check this box if you want the postal bar code printed on the envelope.

Related Topics

[Envelope Options Dialog Box](#)

Rotation (Envelope Options Dialog Box)

Use these radio buttons to select the rotation for the envelope. If you want your envelope to print sideways, you must check either the left or right button here.

Some printers handle the rotation of text differently than others. If you try to print an envelope sideways and the text is upside down, change the setting of the correction check box to fix this problem.

Use the [printer setup](#) button to define the envelope size and orientation for use by the Print Manager.

Related Topics

[Envelope Options Dialog Box](#)

Installation Dialog Box

The following dialog box appears when the program runs for the first time:



The image shows a Windows-style dialog box titled "KazLines Installation". It has a blue title bar with a minus sign on the left. The dialog box has a light gray background with a grid pattern. It contains two text input fields: one labeled "Name" and one labeled "Company". Below the input fields are three buttons: "OK" with a green checkmark icon, "Cancel" with a red X icon, and "Help" with a blue question mark icon.

You must enter your name, but the company field is optional. When the information is correct, push the OK button. Your copy of the program will be personalized with the information you provided.

See Also
[Registration](#)

Registration Dialog Box

The following dialog box appears when the [Register Command](#) is used:



The image shows a dialog box titled "KazLines Registration". It has a blue title bar with a minus sign on the left. The dialog box has a light gray background with a grid pattern. It contains three text input fields, each with a label above it: "Name", "Company", and "Registration Number". At the bottom of the dialog box, there are three buttons: "OK" with a green checkmark icon, "Cancel" with a red X icon, and "Help" with a blue question mark icon.

You must enter your name and the registration number, but the company field is optional. When the information is correct, push the OK button. Your copy of the program is then registered to you. This will remove the one hour limitation of the demonstration version.

If you do not have a registration number, use the [Print Registration Form](#) command to request one.

See Also

[Registration](#), [Registration Command](#), [Print Registration Form](#)

Name

Enter your name in this box so that your copy of the program can be personalized. This field is required.

Company

Enter your company name in this box so that your copy of the program can be personalized. This field is optional.

Serial Number

This is a unique serial number for your copy of the software. Make sure that this number matches the one in the registration letter from [Kaczynski Software](#).

Registration Number

Enter the registration number provided by [Kaczynski Software](#). If you don't have a registration number, use the [Print Registration Form](#) command to request one.

