

ac Voltage and Current Measurement Transducers



OM8 series
\$105
Basic Unit

- ✓ Average Measurement
- ✓ Isolation
- ✓ 0-1 mA and 4-20 mA Outputs Available

The OM8 series transducers convert AC currents and voltages to dc process signals for direct connection to data acquisition and recording systems. The OM8 employ average measurement techniques in conditioning the ac signal. For measurement of currents and voltages greater than listed, the OM8 are directly compatible with OMEGA instrument transformers.

Specifications

Accuracy: 0.2% of Reading
Sustained Input Overrange: Voltage, 120% continuous, 150% for 5 seconds; Current, 200% continuous, 1000% for 5 seconds
Outputs: 0 to 1 mA dc into 10 Kohm 10 Vdc compliance; 4-20 mA into 750 ohm Max 15 Vdc compliance

Zero Adjust: ±5% minimum


Span Adjust: ±10% minimum

Response Time: <400 msec (0-99% of full scale)

Power Consumption: 5 VA max

Isolation: Input to output: 2500 Vac, 60 Hz, 1 min; Input to power: 2500 Vac, 60Hz, 1 min; Input to case: 2500 Vac, 60 Hz, 1 min; Power to Output: 2000 Vac, 60 Hz, 1 min; Power to case: 2000 Vac, 60 Hz, 1 min; Output to case: 500 Vac, 60 Hz, 1 min

Dimensions: Self powered units: 104 H x 101 D x 51 mm D (4.1" x 4.0" x 2.0"); auxiliary powered units: 120 H x 133 W x 96 mm D (4.7" x 5.2" x 3.8")

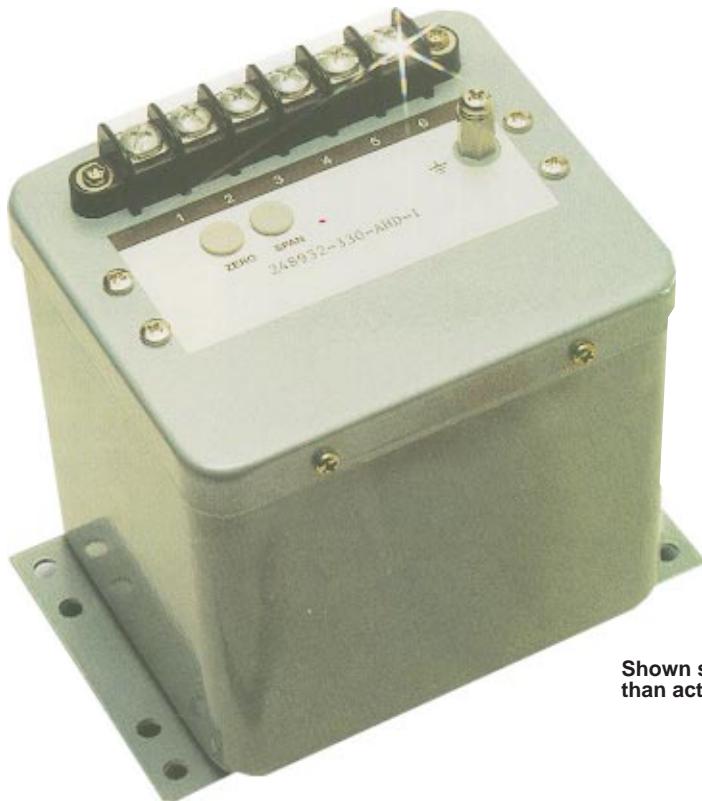

Shown smaller than actual size

ac Current (Average Measuring) Transducers

Model No.	Input Signal	Input Frequency	Output Signal	Power Required	Price
OM8-21382AFA0	0-5 Amp ac	50/60 Hz	0-1 mA dc	Self powered	\$105
OM8-21384AFA0	0-5 Amp ac	400 Hz	0-1 mA dc	Self powered	170
OM8-21382AHD1	0-5 Amp ac	50/60 Hz	4-20mA dc	120 Vac	240
OM8-21384AHD1	0-5 Amp ac	400 Hz	4-20mA dc	120 Vac	305
OM8-21382AHD2	0-5 Amp ac	50/60 Hz	4-20mA dc	240 Vac	240
OM8-21384AHD2	0-5 Amp ac	400 Hz	4-20mA dc	240 Vac	305

ac Voltage (Average Measuring) Transducers

Model No.	Input Signal	Input Frequency	Output Signal	Power Required	Price
OM8-22332AFA0	0-150 Vac	50/60 Hz	0-1 mA dc	Self powered	\$105
OM8-22334AFA0	0-150 Vac	400 Hz	0-1 mA dc	Self powered	170
OM8-22332AHD1	0-150 Vac	50/60 Hz	4-20mA dc	120 Vac	240
OM8-22334AHD1	0-150 Vac	400 Hz	4-20mA dc	120 Vac	305
OM8-22332AHD2	0-150 Vac	50/60 Hz	4-20mA dc	240 Vac	240
OM8-22334AHD2	0-150 Vac	400 Hz	4-20mA dc	240 Vac	305
OM8-22362AFA0	0-300 Vac	50/60 Hz	0-1 mA dc	Self powered	105
OM8-22364AFA0	0-300 Vac	400 Hz	0-1 mA dc	Self powered	170
OM8-22362AHD1	0-300 Vac	50/60 Hz	4-20mA dc	120 Vac	240
OM8-22364AHD1	0-300 Vac	400 Hz	4-20mA dc	120 Vac	305
OM8-22362AHD2	0-300 Vac	50/60 Hz	4-20mA dc	240 Vac	240
OM8-22364AHD2	0-300 Vac	400 Hz	4-20mA dc	240 Vac	305